


# THURSDAY POOLS

Your weekend starts early with us

## Titus 1433 Depth: 3' 5" to 5' 10"

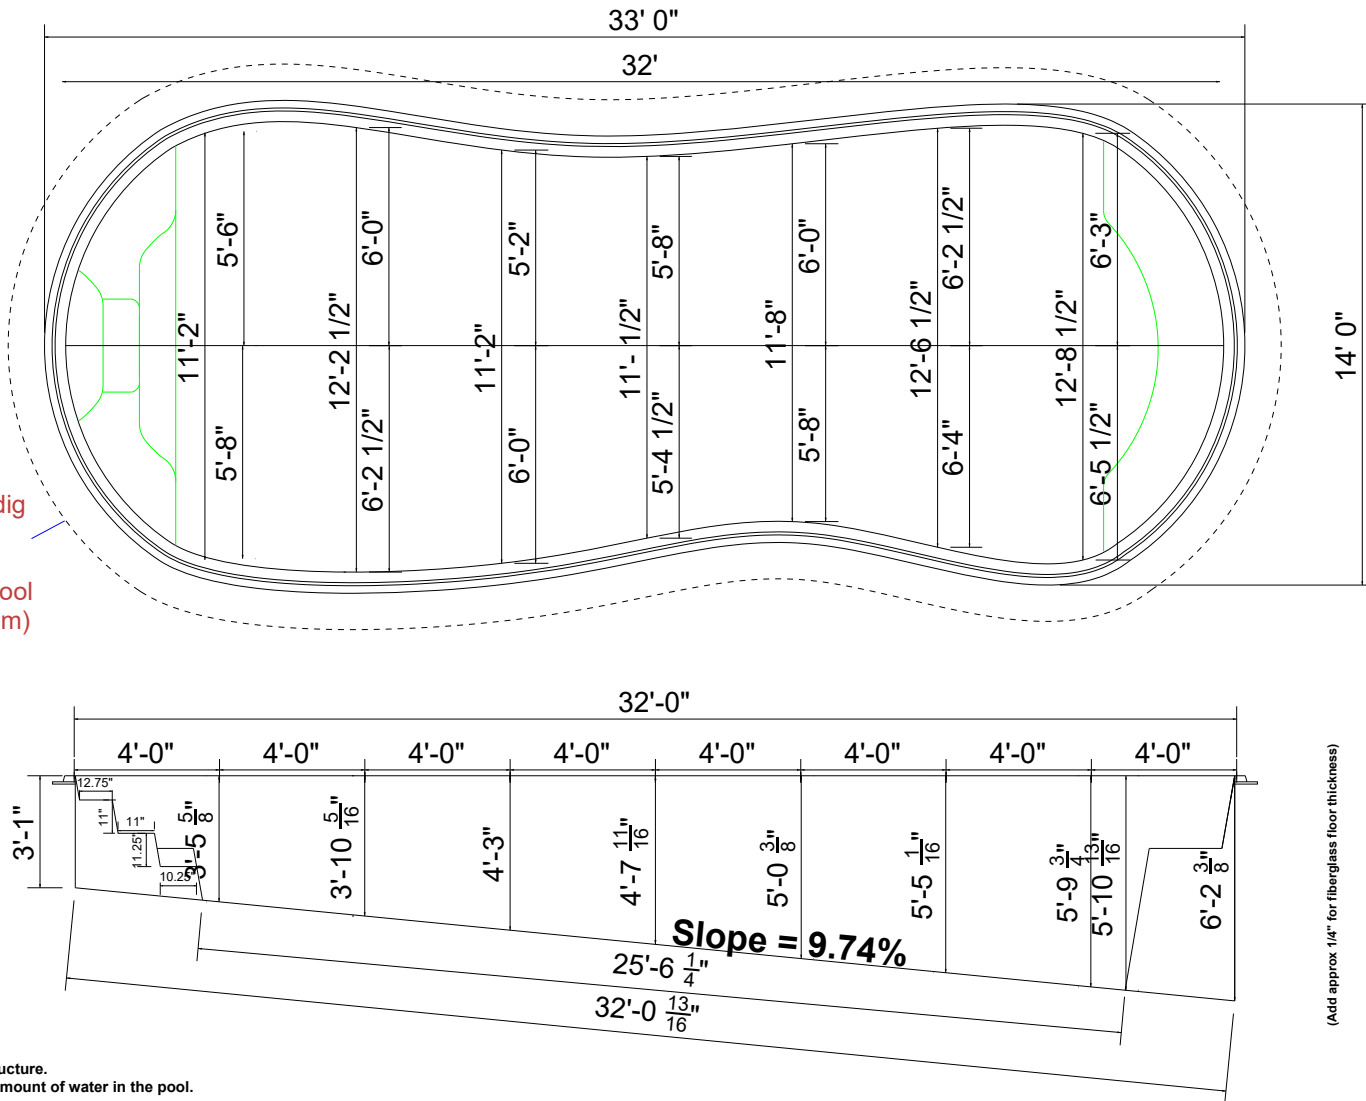

Typical Overdig approx 1'  
If using FPA (Fiberglass Pool Anchor System) 20" to 24"

(Add approx 1/4" for fiberglass floor thickness)

**PLEASE SEE GENERAL CONSTRUCTION AND RECOMMENDED INSTALLATION NOTES**

SPECIFICATIONS:	
volume:	11,000 gal (est)
Weight:	2,200 lbs (est)
Area:	385 sq.ft. (est)
Perimeter:	87' (est)
SCALE:	
CONTROL	
Designed By:	Checked By:
D.C.	TP
Created By:	Checked By:
	BK

**THURSDAY POOLS LLC**  
your weekend starts early with us . . .

840 Commerce Parkway  
Porter, Indiana 46304  
Note: for technical help please call Thursday Pools LLC at  
Toll Free (877) 929-POOL (7665)  
Local (317) 973-0200

NON DIVING POOL

To be filled out by Pool Dealer
POOL NAME: <b>TITUS 1433</b>
OWNER:
ADDRESS:
POOL DEALER:

To be filled out by Thursday Pools, LLC
Date: 6/28/23
Job No.
File No.
Sheet No. <b>D9</b>
Revision No. 01

\*All depths reflect the depth of the pool structure.  
Water depths may vary depending on the amount of water in the pool.

This NOTICE AND DISCLAIMER is made to all retail customers, buyers, and end users of pools manufactured by Thursday Pools. You are by this NOTICE advised that pools manufactured by Thursday Pools (the "MANUFACTURER") are sold by independent dealers and dealerships. Each dealer is an independent businessperson who is completely separate from the MANUFACTURER. Each dealer is an independent contractor, and no dealer is an owner, agent (in fact or law), or employee of the MANUFACTURER. The MANUFACTURER hereby DISCLAIMS any liability for an intentional or negligent act by any dealer, dealership, or installer, or any damage to any Thursday Pools pool caused by an act of any dealer, dealership, or installer.

**General Tolerance +/- 1/2"**